

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



**THOMSON**  
  
**DELPHION**

**RESEARCH**  
[My Account](#) | [Products](#)


**PRODUCTS**  
[Search: Quick/Number Boolean Advanced](#)

**INSIDE DELPHION**

## The Delphion Integrated View


Get Now: ☒ PDF | [More choices...](#)


Tools: Add to Work File: [Create new Wor...](#)


View: [INPADOC](#) | Jump to: [Top](#)  Go to: [Derwent...](#)

 [Ema...](#)

 Title: **JP3222257A2: MANUFACTURE OF LITHIUM ELECTRODE FOR LITHIUM BATTERY**


 Country: **JP Japan**

 Kind: **A**


 Inventor: **NAGAUURA TORU;  
YOKOGAWA MASAOKI;  
NAKAO TOSHIHIKO;  
SATO KATSUZO;**

 Assignee: **SONY CORP.**  
[News, Profiles, Stocks and More about this company.](#)

 Published / Filed: **1991-10-01 / 1990-01-25**

 Application Number: **JP1990000015768**

 IPC Code: **H01M 4/04; H01M 4/64**

 Priority Number: **1990-01-25 JP1990000015768**


 Abstract:


**PURPOSE:** To prevent the adhesion of lithium in a rolled state and the breakage of a lithium foil during operation up to battery assembly for efficient operation by press-attaching the lithium foil formed by extrusion directly to a metal collector foil before winding in a rolled state.

**CONSTITUTION:** A copper foil rolled substance 22 that a copper foil 21 is wound in a rolled state and an extruder 24 for a lithium foil 23 are prepared to have the one face of the copper foil 21, supplied from the copper foil rolled substance 22, and the desired-thickness lithium foil 23, extruded and molded from the extruder 24, faced in opposition, passed through a pair of pressure rollers 25, press-attached to each other and then wound in a rolled state. In this case, for making the lithium foil 23 thin up to a desired thickness, the lithium foil 23 from the extruder 24 is given cold rolling via 4-step rolls 26-29 and cold rolling mechanism 30. It is thus possible to prevent the adhesion of lithium in a rolled state and the breakage of the lithium during operation up to battery assembly for efficient operation.

**COPYRIGHT:** (C)1991,JPO&Japio.

 INPADOC **None** [Get Now: Family Legal Status Report](#)

Legal Status:  Family: [Show 2 known family members](#)

 Other Abstract Info: **DERABS C91-330151 DERC91-330151**





[Nominate](#)

[this for the Gallery...](#)

© 1997-2003 Thomson Delphion

[Research Subscriptions](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact](#)



RESEARCH

PRODUCTS

INSIDE DELPHION

[Home](#) | [About](#) | [My Account](#) | [Products](#)

Search:  Quick/Number Boolean Advanced

## The Delphion Integrated View

Get Now: ☒ PDF | [More choices...](#)

Tools: Add to Work File:

View: INPADOC | Jump to:

**Title:** JP3222257A2: MANUFACTURE OF LITHIUM ELECTRODE FOR LITHIUM BATTERY

**Country:** JP Japan

**Kind:** A

**Inventor:** NAGaura TORU;  
YOKOGAWA MASAaki;  
NAKAO TOSHIHIKO;  
SATO KATSUZO;

**Assignee:** SONY CORP  
[News, Profiles, Stocks and More about this company](#)

**Published / Filed:** 1991-10-01 / 1990-01-25

**Application Number:** JP1990000015768

**IPC Code:** H01M 4/04; H01M 4/64;

**Priority Number:** 1990-01-25 JP1990000015768

**Abstract:**

PURPOSE: To prevent the adhesion of lithium in a rolled state and the breakage of a lithium foil during operation up to battery assembly for efficient operation by press-attaching the lithium foil formed by extrusion directly to a metal collector foil before winding in a rolled state.

CONSTITUTION: A copper foil rolled substance 22 that a copper foil 21 is wound in a rolled state and an extruder 24 for a lithium foil 23 are prepared to have the one face of the copper foil 21, supplied from the copper foil rolled substance 22, and the desired-thickness lithium foil 23, extruded and molded from the extruder 24, faced in opposition, passed through a pair of pressure rollers 25, press-attached to each other and then wound in a rolled state. In this case, for making the lithium foil 23 thin up to a desired thickness, the lithium foil 23 from the extruder 24 is given cold rolling via 4-step rolls 26-29 and cold rolling mechanism 30. It is thus possible to prevent the adhesion of lithium in a rolled state and the breakage of the lithium during operation up to battery assembly for efficient operation.

COPYRIGHT: (C)1991,JPO&Japio

**INPADOC** None **Get Now:** [Family Legal Status Report](#)

**Legal Status:**

**Family:** [Show 2 known family members](#)

**Other Abstract Info:** DERABS C91-330151 DERC91-330151





[Nominate](#)

[this for the Gallery...](#)

© 1997-2003 Thomson Delphion | [Research Subscriptions](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact](#)



(19)

(11) Publication number:

**03**

Generated Document

**PATENT ABSTRACTS OF JAPAN**(21) Application number: **02015768**(51) Intl. Cl.: **H01M 4/04 H01M 4/64**(22) Application date: **25.01.90**

(30) Priority:	(71) Applicant: <b>SONY CORP</b>
(43) Date of application publication: <b>01.10.91</b>	(72) Inventor: <b>NAGAURA TORU YOKOGAWA MASAOKI NAKAO TOSHIHIKO SATO KATSUZO</b>
(84) Designated contracting states:	(74) Representative:

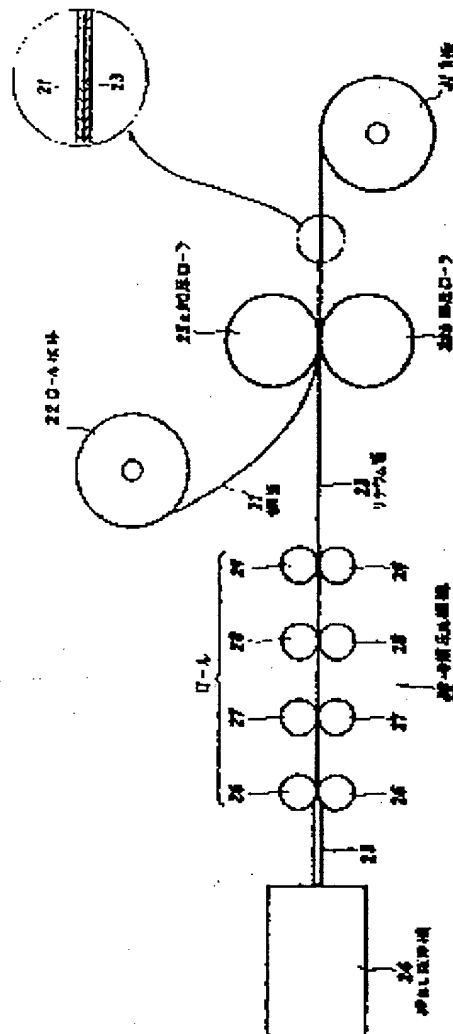
**(54) MANUFACTURE OF  
LITHIUM ELECTRODE FOR  
LITHIUM BATTERY****(57) Abstract:**

**PURPOSE:** To prevent the adhesion of lithium in a rolled state and the breakage of a lithium foil during operation up to battery assembly for efficient operation by press-attaching the lithium foil formed by extrusion directly to a metal collector foil before winding in a rolled state.

**CONSTITUTION:** A copper foil rolled substance 22 that a copper foil 21 is wound in a rolled state and an extruder 24 for a lithium foil 23 are prepared to have the one face of the copper foil 21, supplied from the copper foil rolled substance 22, and the desired-thickness lithium foil 23, extruded and molded from the extruder 24, faced in opposition, passed through a pair of pressure rollers 25, press-attached to each other and then wound in a rolled

state. In this case, for making the lithium foil 23 thin up to a desired thickness, the lithium foil 23 from the extruder 24 is given cold rolling via 4-step rolls 26-29 and cold rolling mechanism 30. It is thus possible to prevent the adhesion of lithium in a rolled state and the breakage of the lithium during operation up to battery assembly for efficient operation.

COPYRIGHT: (C)1991,JPO&Japio







(19)

(11) Publication number:

**03**

Generated Document.

**PATENT ABSTRACTS OF JAPAN**(21) Application number: **02015768**(51) Intl. Cl.: **H01M 4/04 H01M 4/64**(22) Application date: **25.01.90**

(30) Priority:

(43) Date of application  
publication: **01.10.91**(84) Designated contracting  
states:(71) Applicant: **SONY CORP**(72) Inventor: **NAGaura TORU  
YOKOGAWA MASAaki  
NAKAO TOSHIHIKO  
SATO KATSUZO**

(74) Representative:

**(54) MANUFACTURE OF  
LITHIUM ELECTRODE FOR  
LITHIUM BATTERY**

(57) Abstract:

**PURPOSE:** To prevent the adhesion of lithium in a rolled state and the breakage of a lithium foil during operation up to battery assembly for efficient operation by press-attaching the lithium foil formed by extrusion directly to a metal collector foil before winding in a rolled state.

**CONSTITUTION:** A copper foil rolled substance 22 that a copper foil 21 is wound in a rolled state and an extruder 24 for a lithium foil 23 are prepared to have the one face of the copper foil 21, supplied from the copper foil rolled substance 22, and the desired-thickness lithium foil 23, extruded and molded from the extruder 24, faced in opposition, passed through a pair of pressure rollers 25, press-attached to each other and then wound in a rolled

state. In this case, for making the lithium foil 23 thin up to a desired thickness, the lithium foil 23 from the extruder 24 is given cold rolling via 4-step rolls 26-29 and cold rolling mechanism 30. It is thus possible to prevent the adhesion of lithium in a rolled state and the breakage of the lithium during operation up to battery assembly for efficient operation.

COPYRIGHT: (C)1991,JPO&Japio

